


Plastic Foot Switches – IP53 (TER)

DESCRIPTION	PART NUMBER
Single Pedal Footswitch – With Guard	
2 Position, Spring Return, 1NO/1NC	6121
2 Position, Latching, 1NO/1NC	6121/LATCH
2 Position, Spring Return, 2x 1NO/1NC	6122
Twin Pedal Footswitch – With Guard	
2 Position, Spring Return, 1NO/1NC (per pedal)	6131
Replacement Contact Block	
1NO/1NC, Snap Action	SL0036

Notes: - Operational ratings to AC-15: 250V 3A
- Diecast Aluminium models available on request

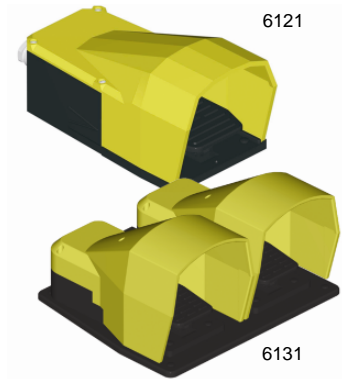

Metal Foot Switches – IP65 (Bernstein)

DESCRIPTION	PART NUMBER
Single Pedal Footswitch	
2 POSITION, SPRING RETURN: - Without Guard, 1NO/1NC - With Full Guard, 1NO/1NC	F1-SU1 F1-SU1-UN
2 POSITION, SPRING RETURN: - Without Guard, 2x 1NO/1NC - With Full Guard, 2x 1NO/1NC	F1-SU2 F1-SU2-UN
PUSH ON – PUSH OFF, MAINTAINED: - Without Guard, 1NO/1NC - With Full Guard, 1NO/1NC	F1-U1Y F1-U1Y-UN
3 POSITION (TWO STAGE): - Without Guard, 1NO/1NC (per stage) - With Full Guard, 1NO/1NC (per stage)	F1-U2D F1- U2D -UN
2 POSITION WITH 10kΩ POT: - Without Guard, 1NO/1NC - With Full Guard, 1NO/1NC	F1-SU1-MI-RG F1-SU1-MI-RG-UN
Twin Pedal Footswitch	
2 POSITION, SPRING RETURN: - Without Guard, 1NO/1NC (per pedal) - With Full Guard, 1NO/1NC (per pedal)	F2-SU1-SU1 F2-SU1-SU1-UN
Triple Pedal Footswitch	
2 POSITION, SPRING RETURN: - Without Guard, 1NO/1NC (per pedal) - With Full Guard, 1NO/1NC (per pedal)	F3-U1-U1-U1 F3-U1-U1-U1-UN
Replacement Contact Blocks	
SU1 : 1NO/1NC, Snap Action	600-6351-039
U1 : 1NO/1NC, Slow Break	600-6101-036
U1Y : 1NO/1NC, With Latch	600-6101-060
SU2 : 2x 1NO/1NC, Snap Action	600-6451-040
U2D : 2-Stage, 1NO/1NC (per stage)	600-6201-058

Notes: Max op ratings for footswitch with 10kΩ POT: Microswitch – 250Vac 5A POT – 140Vac/dc 2W/70°C
- Max operational rating for all other footswitches: 500Vac 10A
- Other contact configurations and options available on request

**Extra heavy duty footswitches
available on request**

