

KombiSIGN 50 / LED Permanent Beacon 848
LED Perm. light element 24VAC/DC GN



| | |
|------------------|---------------------|
| Part No.: | 848.200.55 |
| Series: | KombiSIGN 50 |



MECHANICAL DATA

| | |
|-----------------------------|-------|
| Height | 67 mm |
| Diameter | 52 mm |
| Materials | PC |
| Dome colour | Green |
| Protection category | IP54 |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 52 g |
| Product weight | 41 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 30 mA |
| Rated inrush current | 100 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

OPTICAL DATA

| | |
|----------------------|------------------|
| Light source | LED |
| Light colour | Green |
| Optical signal image | Permanent |
| Service life optical | 50,000 h minimum |

APPROVAL DATA

| | |
|-------------------------------|-----------------------|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / LED Permanent Beacon 848

LED Perm. light element 24VAC/DC GN

| | |
|-----------------------|----|
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

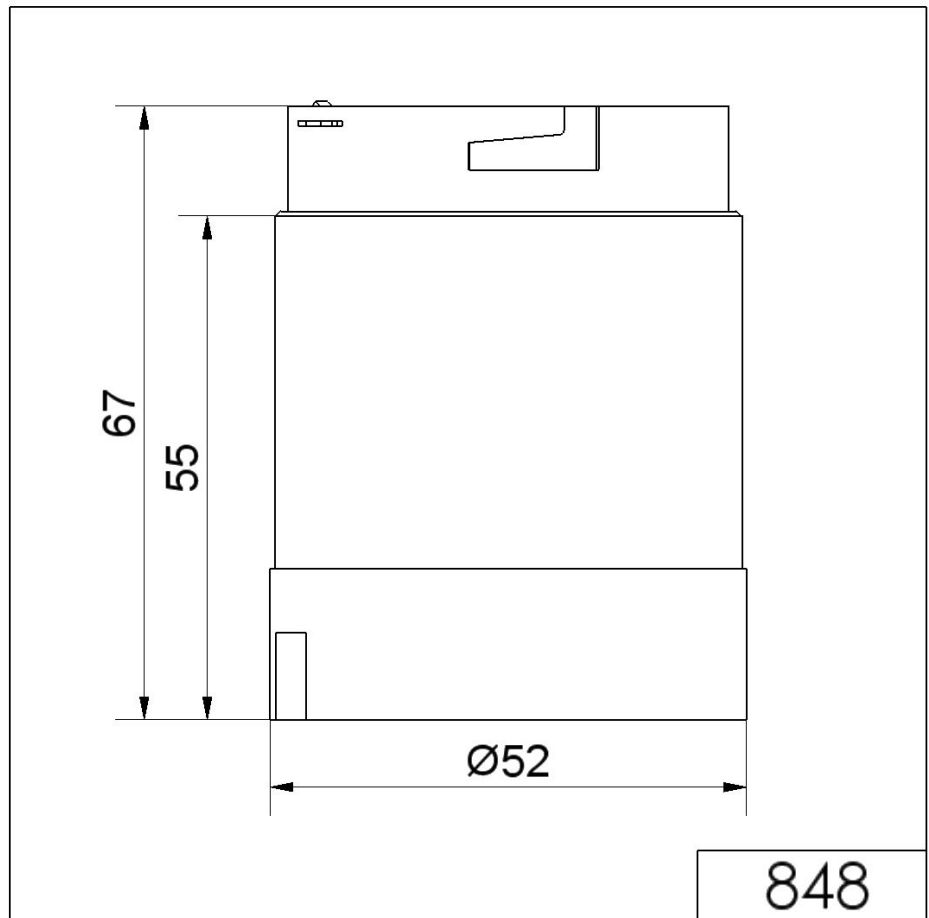

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.