


Series F1


Description **F1-U1ZA2Z R**

Article number **6161000652**


Switching symbol



„Off“ position



“Latch” position

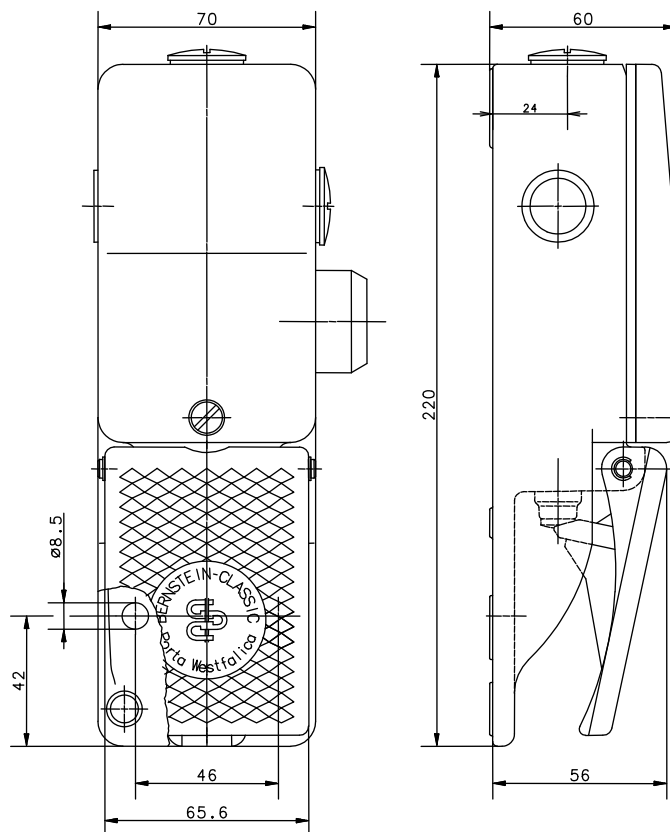

Electrical data

Rated insulation voltage	U_i	400 VAC
Conv. thermal current	I_{the}	10 A
Rated operational voltage	U_e	240 V
Utilization category		AC-15, U_e/I_e 240 V / 3 A
Direct opening action	\rightarrow	acc. to IEC/EN 60947-5-1, Annex K
Short-circuit protective device		Fuse 6 A gL/gG
Protection class		I

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue: 19.02.2013 / Page 1 of 2
Document: 6161000652_en / Status: 1 / 2691-07

Mechanical data	
Enclosure	AL, die-cast, yellow
Cover	AL, die-cast, yellow
Actuator	Foot lever (PA), red
Ambient air temperature	-30 °C to +80 °C
Contact type	3 N.C, 1 N.O. (Zb)
Operating force – Pedal	approx. 10 N (pedal centre)
Mechanical life	1 x10 ⁶ operating cycles
Switching frequency	max. 30/min
Assembly	2 x M8
Connection	screw connections (M3,5)
Number of connections	8
Protection ground	2 x M4
Conductor cross-sections	Solid: 0,5 – 1,5 mm ² Litz wire with or without ferrules: 0,5 – 1,5 mm ²
Cable entrance	3 x M20x1,5
Weight	approx. 0,68 kg
Protection type	IP67 in accordance with IEC/EN 60529
Regulations	
	VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1
EU Conformity	
	CE

Notes

The degree of protection specified (IP code) applies only to a properly closed cover and the use of an equivalent cable gland with adequate cable.

The pedal remains depressed in latch function.