
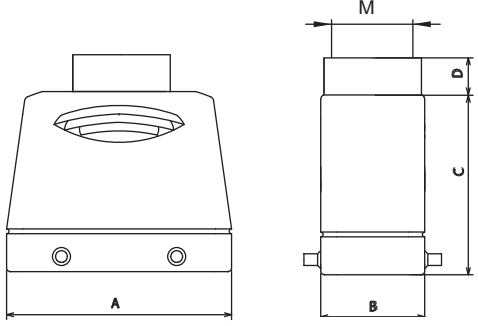






Hoods top entry with 4 pegs for two levers	Size	Thread	Type STD-HV	Type STD																																				
			Part No.	Part No.																																				
 <p>HC - High Construction</p>  <table border="1" data-bbox="159 1187 758 1288"> <tr> <th>Thread</th> <th>M32</th> <th>M40</th> <th>M50</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>D</th> <td>16.5</td> <td>19.5</td> <td>22</td> <td></td> <td></td> <td></td> <td></td> </tr> </table> <table border="1" data-bbox="167 1310 750 1523"> <tr> <th>Size</th> <th>A</th> <th>B</th> <th>C</th> </tr> <tr> <td>10B 57x27</td> <td>73.5</td> <td>43.5</td> <td>75.5</td> </tr> <tr> <td>16B 77x27</td> <td>94</td> <td>43.5</td> <td>75.5</td> </tr> <tr> <td>24B 104x27</td> <td>120.5</td> <td>43.5</td> <td>*75.5</td> </tr> <tr> <td>32B 77x62</td> <td>94</td> <td>83</td> <td>89</td> </tr> </table>	Thread	M32	M40	M50					D	16.5	19.5	22					Size	A	B	C	10B 57x27	73.5	43.5	75.5	16B 77x27	94	43.5	75.5	24B 104x27	120.5	43.5	*75.5	32B 77x62	94	83	89	10B 57x27	M32		7810.6443.0
	Thread	M32	M40	M50																																				
	D	16.5	19.5	22																																				
	Size	A	B	C																																				
10B 57x27	73.5	43.5	75.5																																					
16B 77x27	94	43.5	75.5																																					
24B 104x27	120.5	43.5	*75.5																																					
32B 77x62	94	83	89																																					
16B 77x27	M32		7816.6445.0																																					
24B 104x27	M40		7824.6448.0																																					
32B 77x62	M50		7832.6580.0	7832.6580.0																																				

*For threads M40 C = 81 with hoods LS (large shape) type

- 



- Type: STD for standard applications and inserts up to 500V series: S-D, S-DD, S-E, S-ES, S-EP, S-ESHV, S-EE, S-HSB, S-K, S-M, S-EHV crimp.
 - Type: STD-HV for standard applications and inserts up to 830V, S-EHV series screw terminal and S-HSB for applications over 500V up to 830V.
 - IP66 protection degree
 - For IP66 cable glands