
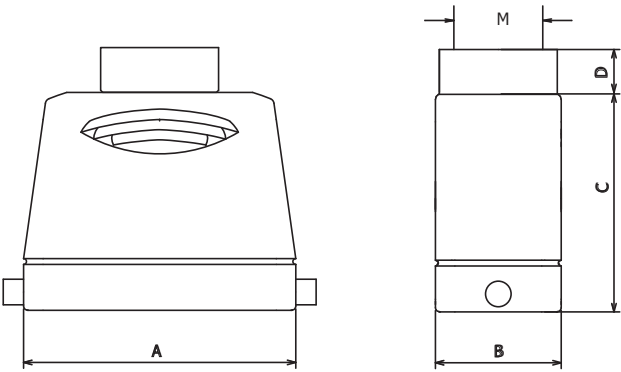






Hoods top entry with 2 pegs for one lever	Size	Thread	Type STD-HV	Type STD																																										
			Part No.	Part No.																																										
 <p>HC - High construction</p>  <table border="1" data-bbox="124 1214 793 1314"> <tr> <th>Thread</th> <td></td> <td>M32</td> <td>M40</td> <td>M50</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>D</th> <td></td> <td>16.5</td> <td>19.5</td> <td>22</td> <td></td> <td></td> <td></td> <td></td> </tr> </table> <table border="1" data-bbox="164 1352 748 1637"> <thead> <tr> <th>Size</th> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>10B 57x27</td> <td>73.5</td> <td>43.5</td> <td>75.5</td> </tr> <tr> <td>16B 77x27</td> <td>94</td> <td>43.5</td> <td>75.5</td> </tr> <tr> <td>24B 104x27</td> <td>120.5</td> <td>43.5</td> <td>*75.5</td> </tr> <tr> <td>32B 77x62</td> <td>94</td> <td>83</td> <td>89</td> </tr> <tr> <td>48B 104x62</td> <td>132</td> <td>90</td> <td>103</td> </tr> </tbody> </table>	Thread		M32	M40	M50					D		16.5	19.5	22					Size	A	B	C	10B 57x27	73.5	43.5	75.5	16B 77x27	94	43.5	75.5	24B 104x27	120.5	43.5	*75.5	32B 77x62	94	83	89	48B 104x62	132	90	103	10B 57x27	M32		7810.6451.0
	Thread		M32	M40	M50																																									
	D		16.5	19.5	22																																									
	Size	A	B	C																																										
	10B 57x27	73.5	43.5	75.5																																										
	16B 77x27	94	43.5	75.5																																										
24B 104x27	120.5	43.5	*75.5																																											
32B 77x62	94	83	89																																											
48B 104x62	132	90	103																																											
16B 77x27	M32		7816.6453.0																																											
24B 104x27	M40		7824.6456.0																																											
32B 77x62	M40	7832.6562.0	7832.6562.0																																											
48B 104x62	M50	7848.6568.0	7848.6568.0																																											
*For threads M40 C = 81 with hoods LS (large shape) type																																														
<p>     </p> <ul style="list-style-type: none"> - Type: STD for standard applications and inserts up to 500V series: S-D, S-DD, S-E, S-ES, S-EP, S-EE, S-HSB, S-ESHV, S-K, S-M, S-EHV crimp - Type: STD-HV for standard applications and inserts up to 830V, S-EHV series screw terminal and S-HSB for applications over 500V up to 830V. - IP66 protection degree - For IP66 cable glands 																																														