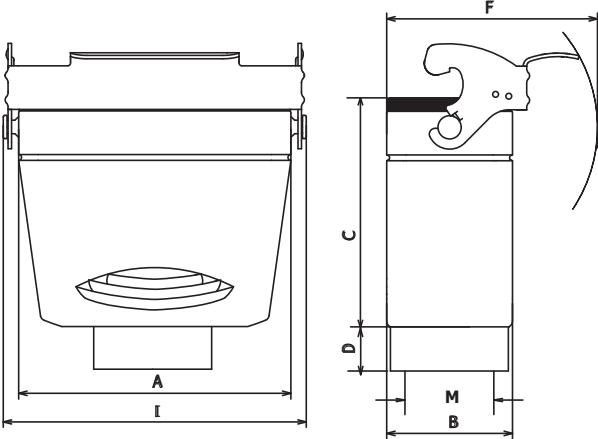


Hoods top entry with one lever and gasket	Size	Thread	Type STD-HV	Type STD																																												
			Part No.	Part No.																																												
 HC - High Construction  <table><tr><td>Thread</td><td></td><td>M32</td><td>M40</td><td></td><td></td><td></td></tr><tr><td>D</td><td></td><td>16.5</td><td>19.5</td><td></td><td></td><td></td></tr></table><table><tr><td>Size</td><td>A</td><td>B</td><td>C</td><td>I</td><td>F</td></tr><tr><td>10B 57x27</td><td>73.5</td><td>43.5</td><td>81</td><td>84</td><td>73</td></tr><tr><td>16B 77x27</td><td>94</td><td>43.5</td><td>81.5</td><td>104</td><td>73</td></tr><tr><td>24B 104x27</td><td>120.5</td><td>43.5</td><td>81.5</td><td>131</td><td>73</td></tr><tr><td>32B 77x62</td><td>94</td><td>83</td><td>119</td><td>104.5</td><td>116</td></tr></table>    US Type 4/4x/12  - Type: STD for standard applications and inserts up to 500V series: S-D, S-DD, S-E, S-ES, S-EP, S-EE, S-HSB, S-ESHV, S-K, S-M, S-EHV crimp - Type: STD-HV for standard applications and inserts up to 830V, S-EHV series screw terminal and S-HSB for applications over 500V up to 830V. - IP66 protection degree - For IP66 cable glands	Thread		M32	M40				D		16.5	19.5				Size	A	B	C	I	F	10B 57x27	73.5	43.5	81	84	73	16B 77x27	94	43.5	81.5	104	73	24B 104x27	120.5	43.5	81.5	131	73	32B 77x62	94	83	119	104.5	116	10B 57x27	M32		7810.7009.0
	Thread		M32	M40																																												
	D		16.5	19.5																																												
	Size	A	B	C	I	F																																										
10B 57x27	73.5	43.5	81	84	73																																											
16B 77x27	94	43.5	81.5	104	73																																											
24B 104x27	120.5	43.5	81.5	131	73																																											
32B 77x62	94	83	119	104.5	116																																											
16B 77x27	M32		7816.6462.0																																													
24B 104x27	M32		7824.6464.0																																													
32B 77x62	M40	7832.6585.0	7832.6585.0																																													