




Systems of accessories for electrical installations used for residential, tertiary and industrial applications. The system consists of fasteners for pipes and cables, cable fittings, accessories for rigid pipes (RK Series) and flexible conduit (DF Series). The system include also a wide variety of cable ties (52FS Range) and terminal blocks (44 Range).

| | | | |
|----------------------|---------------|----------------------------|---------------------------------|
| Colour | Grey RAL 7035 | IP degree | IP66 |
| Material | Nylon | For cables Ø (mm) | from 9 to 10/from 17 to 20 |
| PG pitch | 21 | For external conduits (mm) | 25 |
| Mounting hole Ø (mm) | 29 | Description | Cable gland |
| Glow Wire Test | 650 °C | Operating temperature | -25 +65 °C |
| Electrocod | 36B | Standard | EN 50262 - IEC62444 - DIN 40430 |

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids | | Bases | | Solvents | | | | Mineral oil | UV rays |
|-----------------|--------------------|--------------------|--------------|-----------|-----------|-----------|-----------|---------------|-------------|--------------------|
| | Concentrated | Diluted | Concentrated | Diluted | Hexane | Benzol | Acetone | Ethyl alcohol | | |
| Resistant | Limited resistance | Limited resistance | Resistant | Resistant | Resistant | Resistant | Resistant | Resistant | Resistant | Limited resistance |

DIMENSIONAL

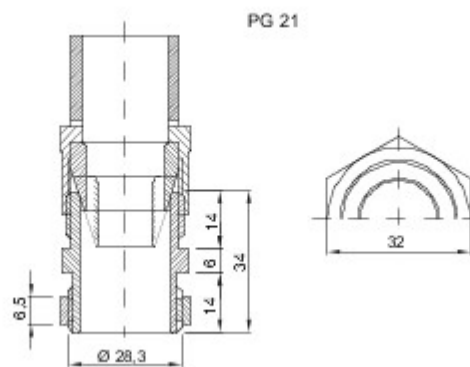


TECHNICAL SYMBOLOGY

IP

IP66

GWT

650 °C



-25 +65 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 09/11/2022

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice