

Part number
CKM 04



Male insert, CK series, screw terminal connection, 4 poles + PE, 10 A 230/400 V 4 kV 3, size "21.21"


Product description	
Product type	Insert
Series	CK
Connection type	Screw terminal connection
Gender	Male
N. of poles	4 poles +
Size	Size 21.21
Technical data	
Current	10 A
Voltage	230 - 400 V
Rated impulse withstand voltage	4 kV
Pollution degree	3
Rated voltage according to UL/CSA	600 V
Wire cross-section	0,75 mm ² - 2,50 mm ²
AWG size	18 - 14
Contact type	Turned silver plated
IP degree of protection	IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure
Further technical details	
Characteristics according to EN 61984	10A 230/400V 4kV 3; 10A 400/690V 4kV 2
Mating cycles	≥ 500
Insulation resistance	≥ 10 GΩ
Contact resistance	≤ 2 mΩ
Weight	14,50 g
Operating temperature range (min, max)	-40°C ... +100°C
Conductors stripping length	6 mm
UL 94 flammability rating	V-1
Torque for main contact	M3: 0,5 Nm; 4,4 lb.in (0,5 x 3 mm)
Tightening torque for PE connection	M3: 0,5 Nm; 4,4 lb.in (0,5 x 3 mm)
Tightening torque for fixing screws	M3: 0,5 Nm; 4,4 lb.in (Ph1 or 0,8 x 5,5 mm)

Material properties	
Main material	Polycarbonate (PC)
Other materials	Contacts: copper alloy Gasket: NBR
Colour	RAL 7032 grey
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Approvals / Standards	
Reference standard	EN 61984:2009-06
Certifications	CSA, CQC, DNV, BV, EAC
UL	ECBT2
General ordering information	
EAN13 code	8015747028295
eCl@ss 8.1	27440205
ETIM 7.0	EC000438
Packaging Information	
Packaging length	210,00 mm
Packaging height	200,00 mm
Packaging width	130,00 mm
Packaging weight	3,19 kg
Packaging volume	5,46 dm ³
Packaging description	Carton box
Packaging quantity	200 Pcs
Packaging EAN code	8015747028301
Sub-packaging length	197,00 mm
Sub-packaging height	35,00 mm
Sub-packaging width	113,00 mm
Sub-packaging weight	0,64 kg
Sub-packaging volume	0,78 dm ³
Sub-packaging description	Carton tray
Sub-packaging quantity	40 Pcs
Sub-packaging EAN barcode	8015747028318

Part number
CKM 04




Catalogue drawings

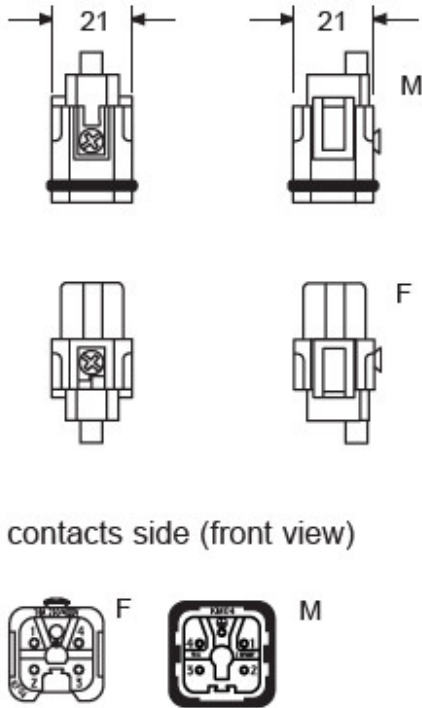

contacts side (front view)

Derating curves

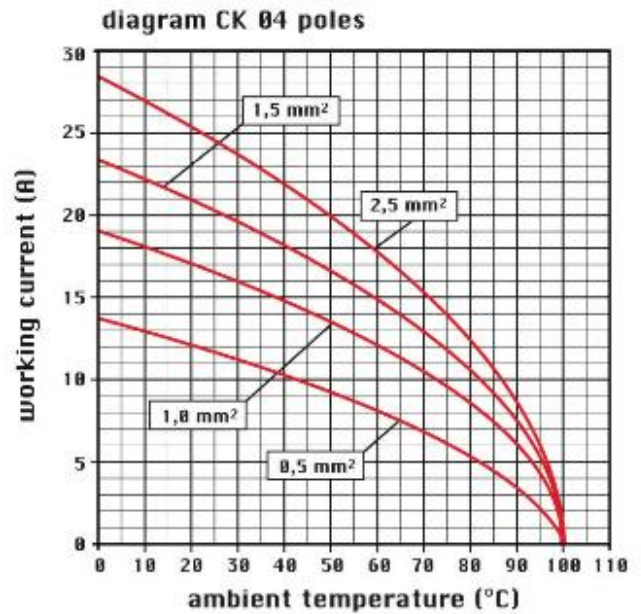

Notes

Dimensions shown in mm are not binding and may be changed without notice.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

Part number

CKR 65



Screw, with gasket, for IP66/67/69 for enclosures 21.21

Product description

Product type Screw
Specification With gasket, for IP66/IP67/IP69

Further technical details

Weight 0,70 g

General ordering information

EAN13 code 8015747028417
eCl@ss 8.1 27449290
ETIM 7.0 EC002943

Packaging Information

Packaging weight 0,36 kg
Packaging description Plastic bag
Packaging quantity 500 Pcs
Packaging EAN code 8015747171076
Sub-packaging description Plastic bag
Sub-packaging quantity 10 Pcs
Sub-packaging EAN barcode 8015747028424

Part number

CKR 65



Notes

CKR 65: for CK, CQ 05 and CKS inserts

Dimensions shown in mm are not binding and may be changed without notice.
