





Top entries	2xØ 23	Glow Wire Test	650 °C
IP degree	IP67	Shock resistance	IK08
Bottom entries	1xØ 29/37	Electrocod	2222
Houseable IB socket-outlets	N. 1 IEC 309 16-32A IP44/67 + N.1 16A MAX 3P+E or GW274	Minimum installation temperature	-25°C

DIMENSIONAL

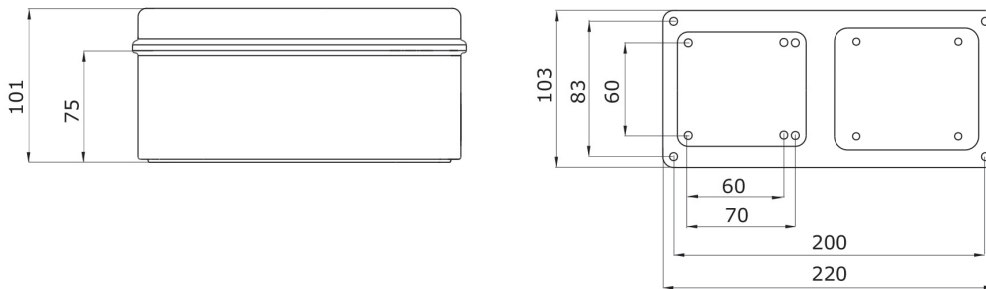

TECHNICAL SYMBOLOGY

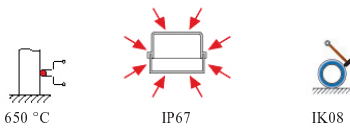

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 22/05/2018

Data, measures, designs and pictures are shown only as
informativ purposes,
and could be changed without previous notice