



VERSION EMPTY						
Type	No EN 50022 modules	Code	Scheme	Predisposition	Power dissipation	Static loads
	5	GW 68 017 N		1 IEC 309 16A socket-outlet IP44/67 or GW 27 401 watertight cap	10 W	3 Kg
		GW 68 018 N		2 IEC 309 16A socket-outlets IP44/67 or GW 27 401 watertight caps		
		GW 68 001 N		3 IEC 309 16A socket-outlets IP44/67 or GW 27 401 watertight caps		
		GW 68 031 N		3 IEC 309 16A socket-outlets IP44/67 or GW 27 401 watertight caps and shockproof case		
		GW 68 020 N		2 IEC 309 16-32A socket-outlets IP44/67 or GW 27 401 watertight caps		
		GW 68 026 N		4 domestic socket std 50x50mm IP54		
		GW 68 032 N		4 domestic socket std 50x50mm IP54 and shockproof case		
	10	GW 68 002 N		Blank	16 W	8 Kg
		GW 68 003 N		2 IEC 309 16A socket-outlets max 3P+T IP44/67 or GW 27 401 watertight caps 2 IEC 309 16-32A socket-outlets IP44/67 or GW 27 401 watertight caps		
		GW 68 019 N		2 horizontal 16-32A interlocked switched socket-outlets IP44 with rotary switch		
		GW 68 025 N		2 vertical 16-32A interlocked switched socket-outlets IP67		
		GW 68 027 N		3 domestic socket std 50x50mm IP54 2 IEC 309 socket-outlets 16-32A IP44/67		
	14	GW 68 004 N		Blank	24 W	12 Kg
		GW 68 005 N		3 IEC 309 16-32A socket-outlets IP44/67 or GW 27 401 watertight caps		
		GW 68 006 N		2 horizontal 16-32A interlocked switched socket-outlets IP44 with rotary switch		
		GW 68 007 N		Blank		
		GW 68 008 N		6 IEC 309 16-32A socket-outlets IP44/67 or GW 27 401 watertight caps		
		GW 68 009 N		4 horizontal 16-32A interlocked switched socket-outlets IP44 with rotary switch		
		GW 68 010 N		3 vertical 16-32A interlocked switched socket-outlets IP67		
	20	GW 68 012 N		Blank	30 W	15 Kg
		GW 68 013 N		8 IEC 309 16-32A socket-outlets IP44/67 or GW 27 401 watertight caps		
		GW 68 021 N		4 IEC 309 16-32A socket-outlets IP44/67 or GW 27 401 watertight caps 4 IEC 309 63A socket-outlets		
		GW 68 014 N		4 horizontal 16-32A interlocked switched socket-outlets IP44 with fuse-holder base		
		GW 68 015 N		4 vertical 16-32A interlocked switched socket-outlets IP67 4 IEC 309 16A 2P+T socket-outlets IP44/67 or GW 27 401 watertight caps		
		GW 68 022 N		2 vertical 16-32A interlocked switched socket-outlets IP67 1 vertical 63A interlocked switched socket-outlets IP67		
	14	GW 68 023 N		Additional 14-module module	25 W	5 Kg
	20	GW 68 024 N		Additional 20-module module	35 W	

COMPLEMENTARY ITEMS			Code	No. DIN modules
		Metal tube support	GW 68 431	10
			GW 68 433	14 / 20
		Metal tube carriage	GW 68 432	14 / 20
		Pole fixing brackets	GW 46 552	14
			GW 46 553	20
		Brackets for surface-mounting	GW 46 446	10 / 14 / 20
			GW 46 451	
		Brackets for surface-mounting	GW 44 621	5
		Mushroom-head emergency button, diameter 40mm	GW 74 361 GW 74 362 GW 74 363 GW 74 364 GW 74 365 GW 74 366 GW 74 367	10 / 14 / 20 / 5 (only GW68026N GW68032N)
		Contacts - ITH= 10A - 250V AC	GW 74 501 (NO)	Green
			GW 74 502 (NC)	Red
		Insulated earth and neutral terminal blocks	GW 40 401 - GW 40408B GW 40 408U	10
			GW 40 401 - GW 40402 GW 40 408B - GW 40 408U GW 40 412B - GW 40412U	14 / 20
		Cylinder security lock	GW 40 422	10 / 14 / 20 / additional module
		Handle for transport	GW 68 436N	10 / 14 / 20 / additional module
		Adapter flange	GW 66 715N	For vertical socket-outlet 16/32A IP67
			GW 66 716N	For vertical socket-outlet 63A IP67
		Watertight cap for 2 System range modules	GW 27 401 GW 27 403	Suitable for 2 System range modules
		Back-mounting plate in insulating material	GW 44 626	10
			GW 44 627	14
			GW 44 628	20




A unique insulating system applied to live parts to ensure a degree of protection against electrical contacts even in case of failure of the main insulation system. This action prevents the occurrence of a dangerous residual voltage on accessible parts, particularly when the main insulation system is no longer capable of working as specified. Complete insulation of the Q-DIN is guaranteed for construction by using the special module covering masks.

IP65

To ensure the declared rating of protection use the following accessories.
Use the screw-caps to close the screw fastener seats, or alternatively use the wall fixing brackets

INLETS

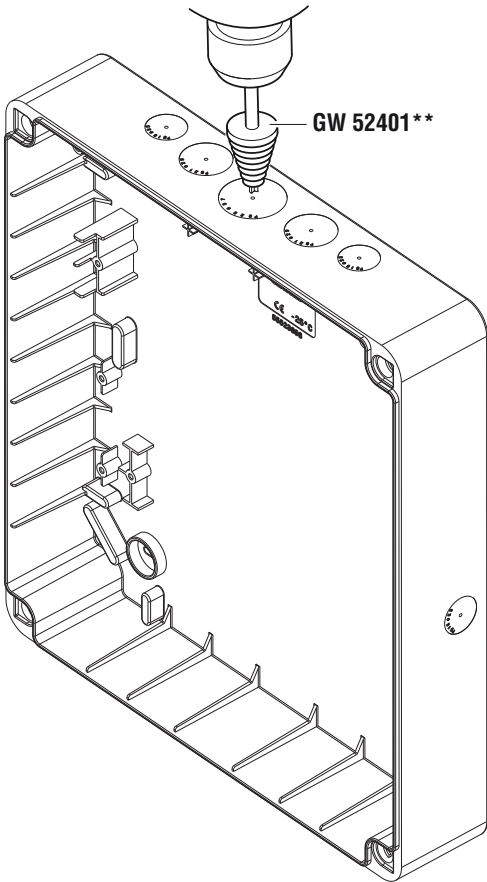


	50 AC	SERIE 52 PGT	52 PG
			
NUMBER OF KNOCKOUT HOLES ON EACH HEAD			
	Ø 23	Ø 29	Ø 37
Q - DIN 5	0	1	
Q - DIN 10	2	1	
Q - DIN 14	2	2	1
Q - DIN 20	2	2	3


**Use a multi-diameter cutter (not supplied) to make the inlets

ASSEMBLING A WALL


GW 46 446/GW 46 451
Not supplied

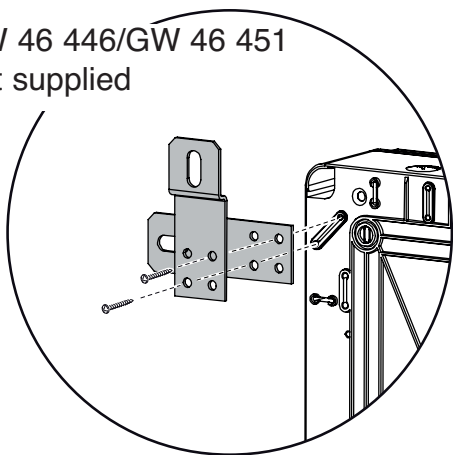

GW 44 621
Not supplied

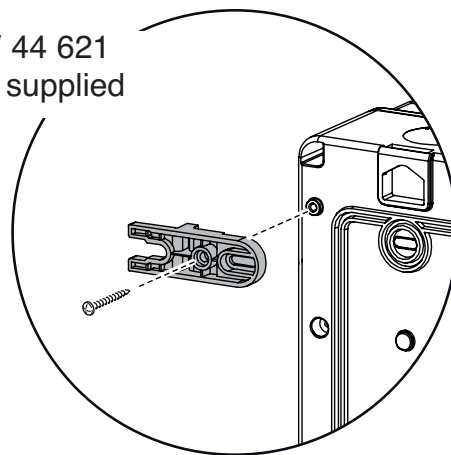


Supplied

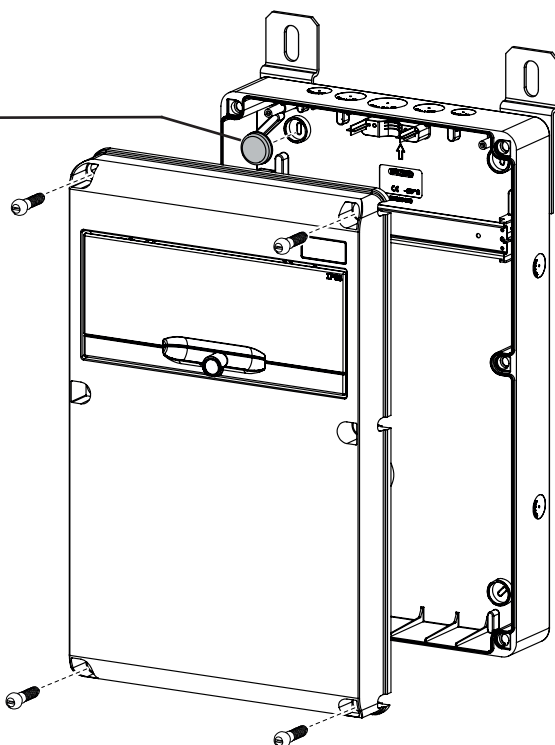


ASSEMBLY OF BRACKETS FOR POLE

GW 46 552/GW 46 553
Not supplied

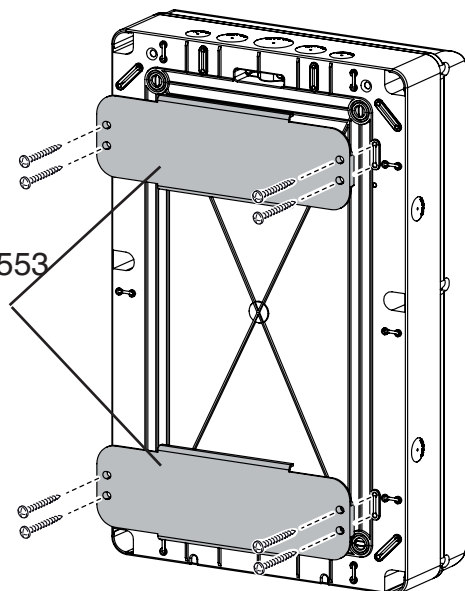


ASSEMBLY OF HANDLE

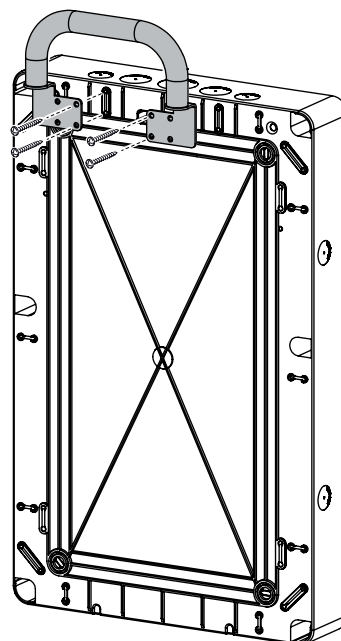


ASSEMBLY ADDITIONAL MODULE

1

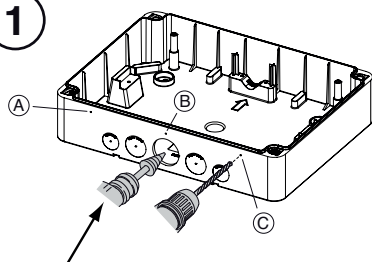


GW 52 401
Not supplied

2

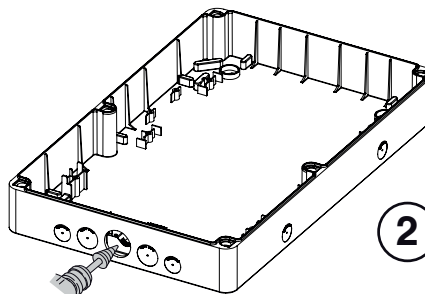

3

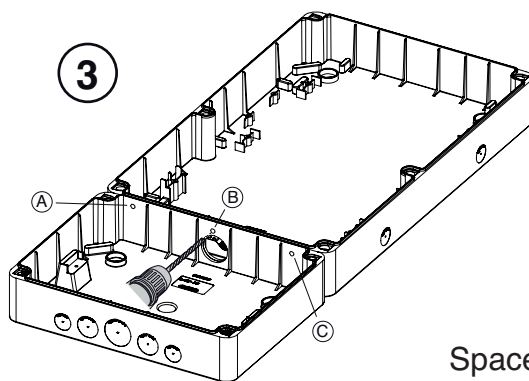

Spacer


M4 flanged nut

M4x18 screw


Gasket

Flat washer

4

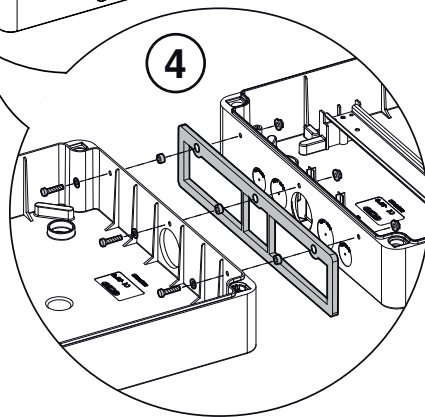

5

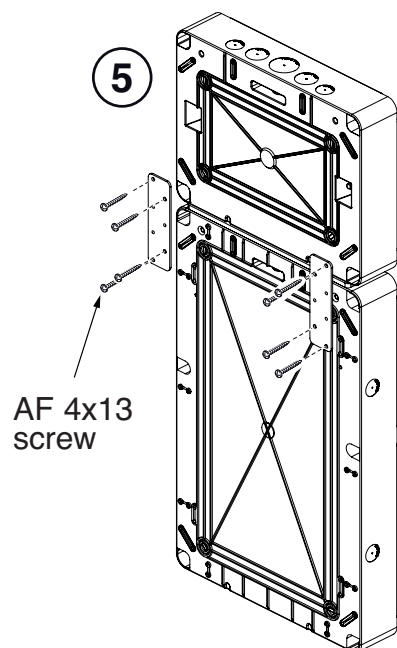


AF 4x13
screw




WARNING: fix the Q-DIN complete with additional module to a wall only, using the GW 46 446/GW 46 451 brackets.

ASSEMBLY TERMINAL BLOCKS


							
	A						
	GW 40 401	GW 40 408B	GW 40 408U	GW 40 402	GW 40 412B	GW 40 412U	GW 40 422U
	125A - 2P	80A - 2P	80A - 1P	125A - 2P	80A - 2P	80A - 1P	80A - 1P
1P	n°1x25mm² n°7x10mm²	n°2x16mm² n°7x10mm²	n°2x16mm² n°7x10mm²	n°3x25mm² n°10x10mm²	n°3x16mm² n°11x10mm²	n°3x16mm² n°11x10mm²	n°3x16mm² n°29x10mm²

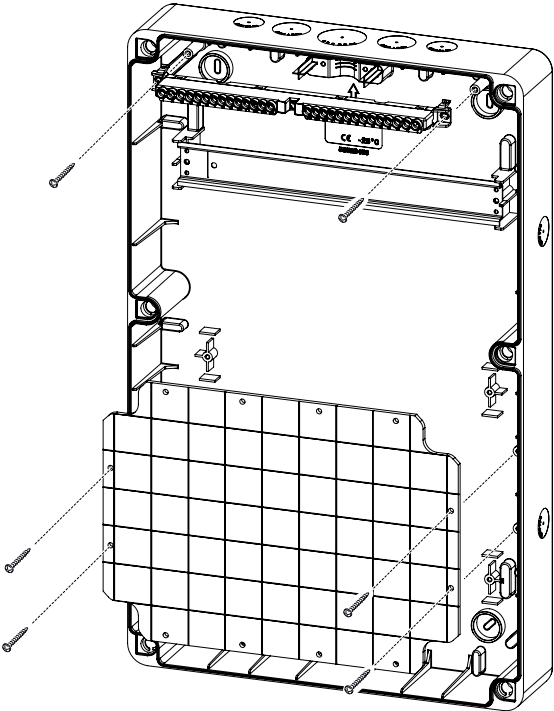

GW 40 413

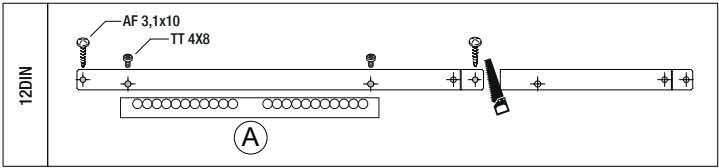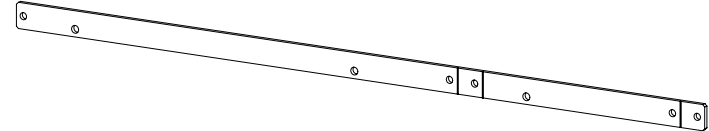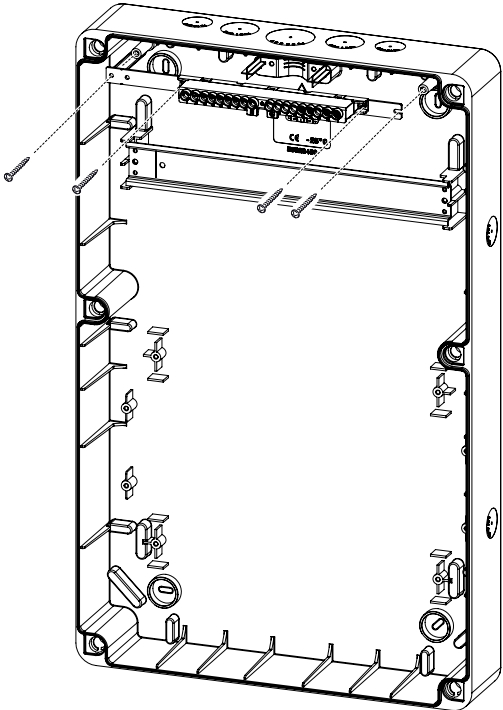


ASSEMBLY MUSHROOM-HEAD EMERGENCY BUTTON

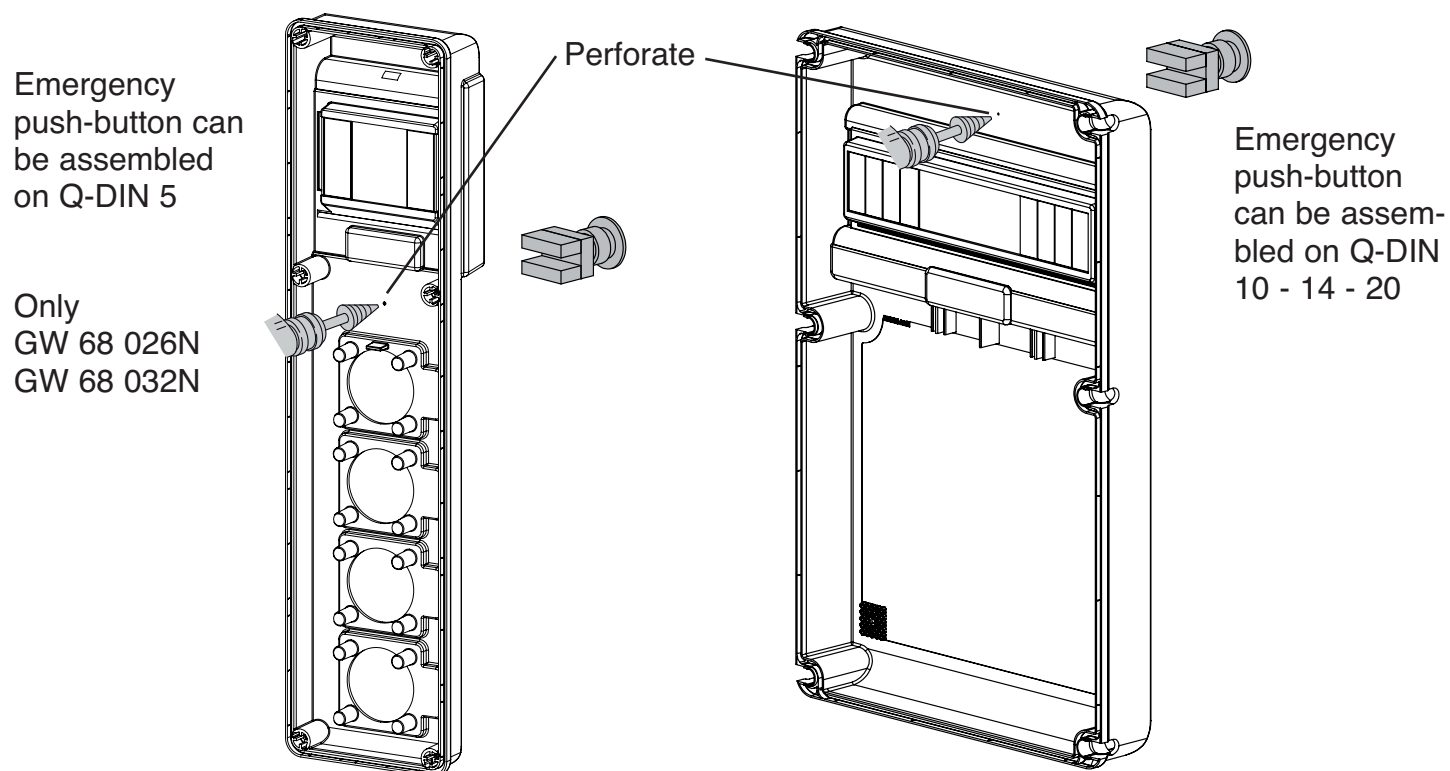


ASSEMBLY CYLINDER SECURITY LOCK


WARNING: the lever of the lock must only be assembled in the position shown in the figure.

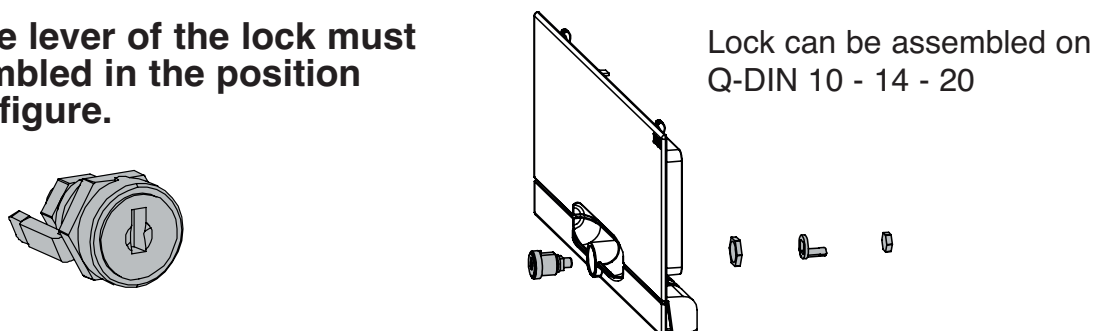


INSERTION THE 5th MODULE

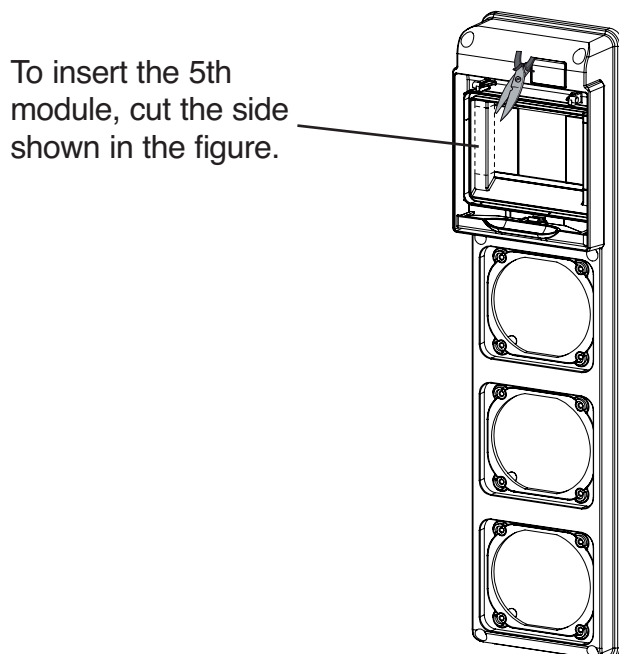


Q-DIN 5-MODULE BOARD

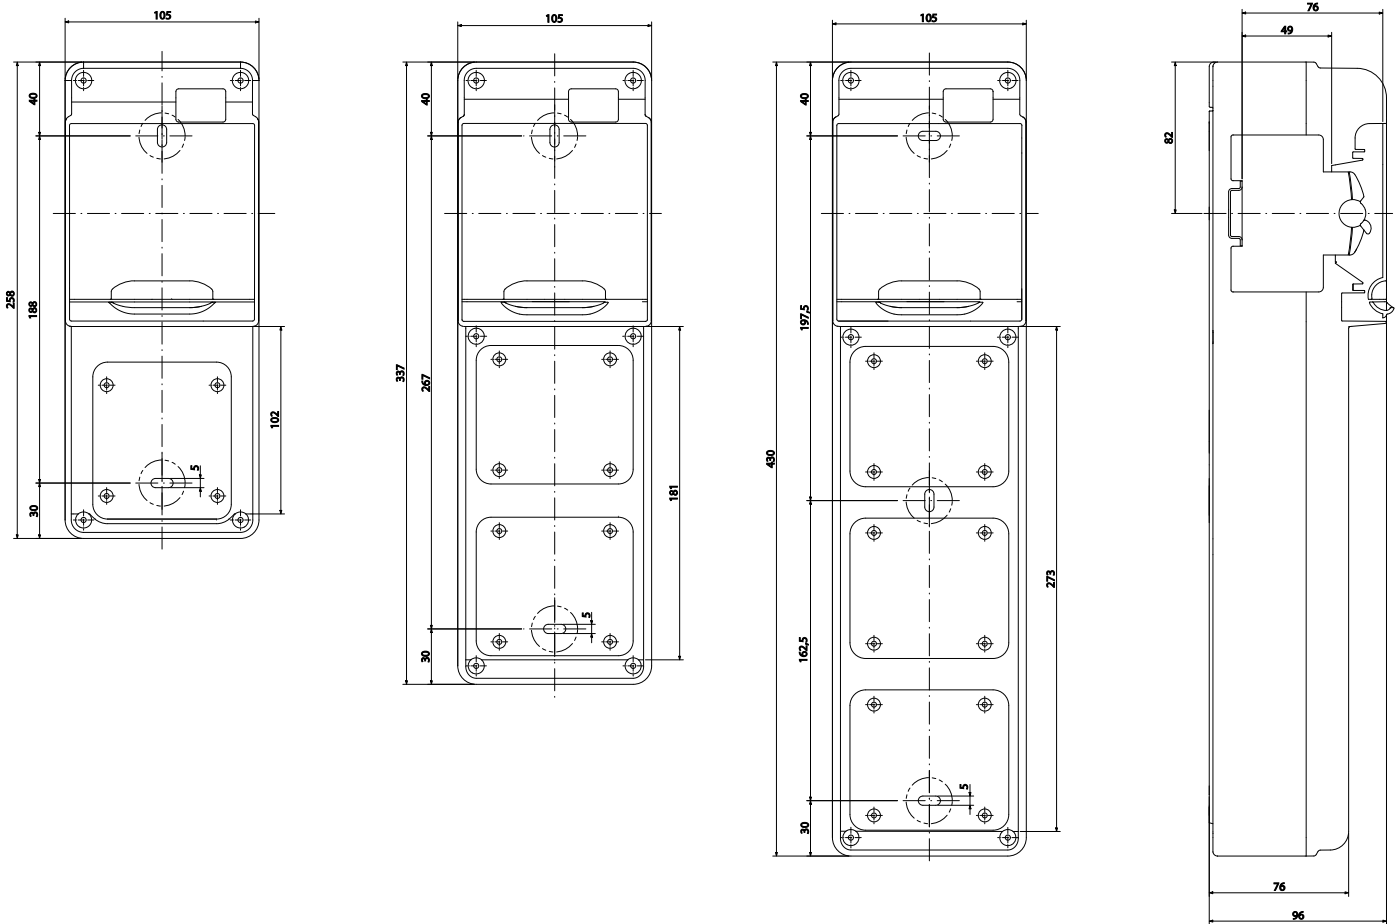


Q-DIN 10-MODULE BOARD

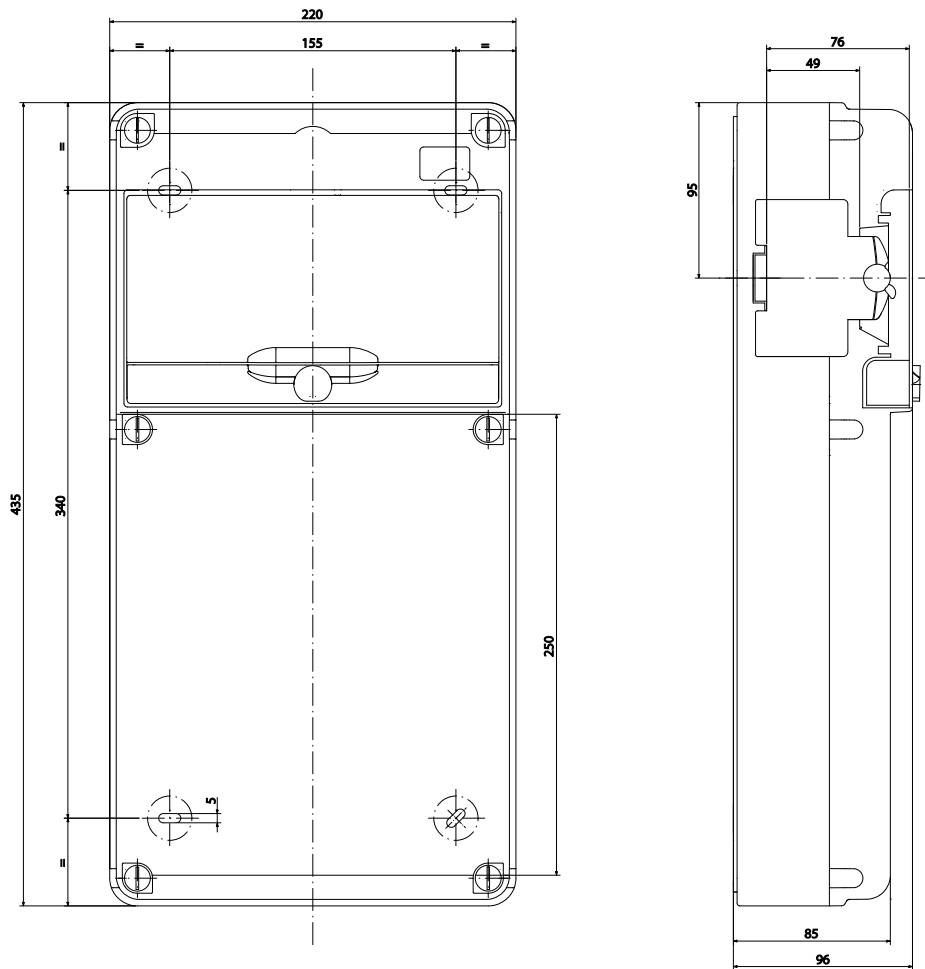



Q-DIN 14-MODULE BOARD

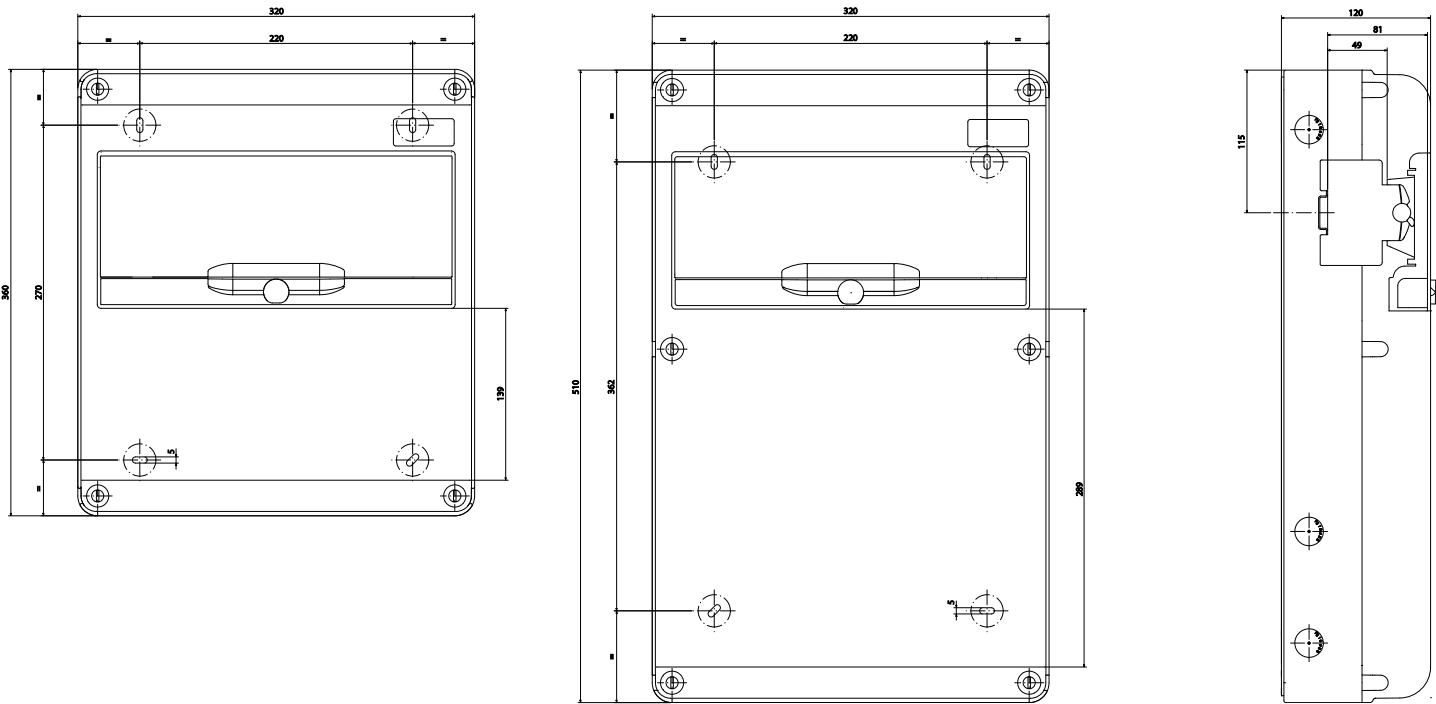

Q-DIN 20-MODULE BOARD


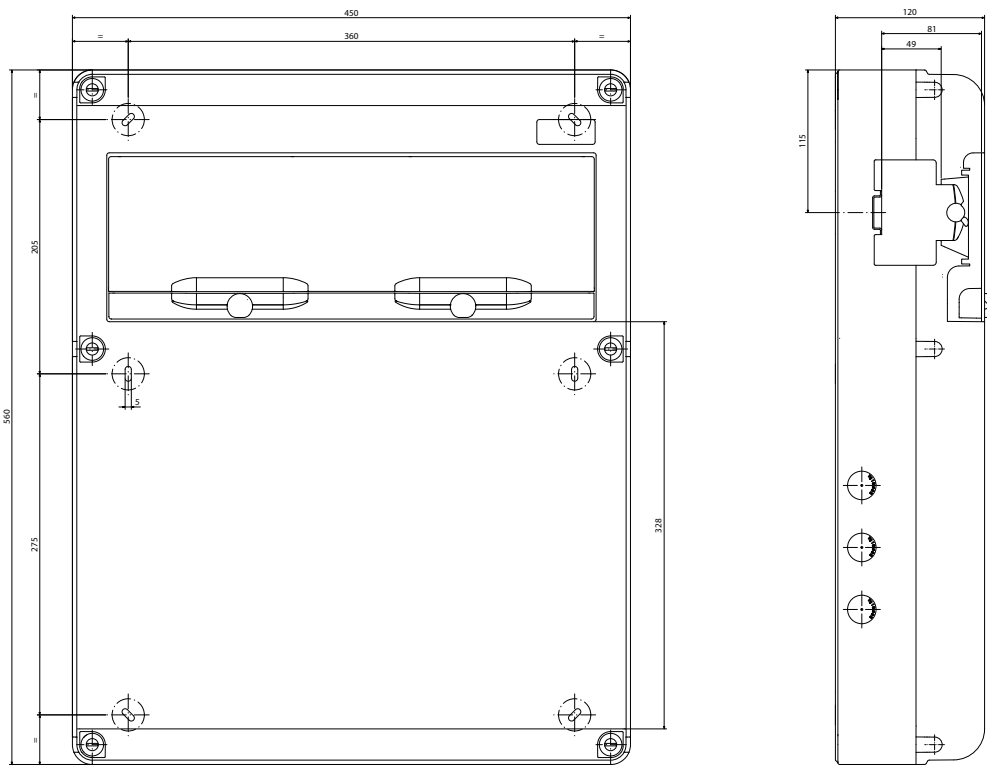


Q-DIN 14-MODULE BOARD ADDITIONAL MODULE

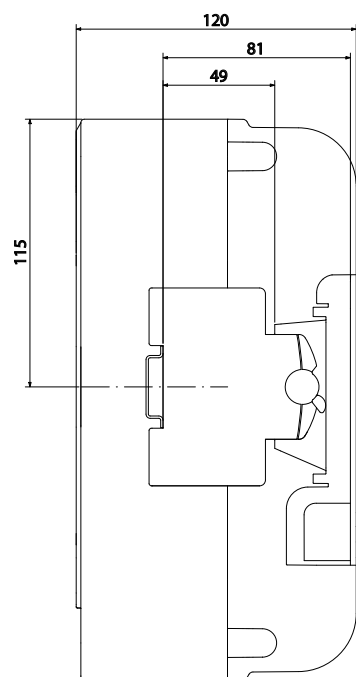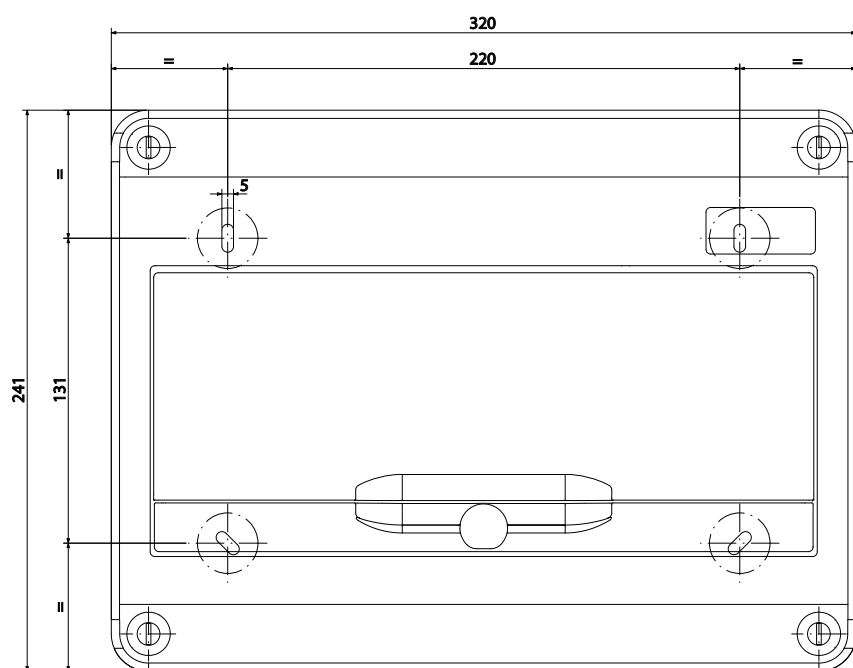

cod. 7.55.4.184.7_EN

Q-DIN 20-MODULE BOARD ADDITIONAL MODULE

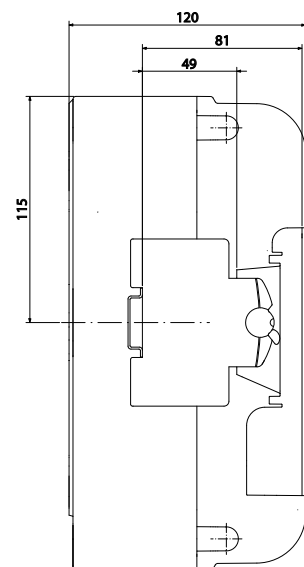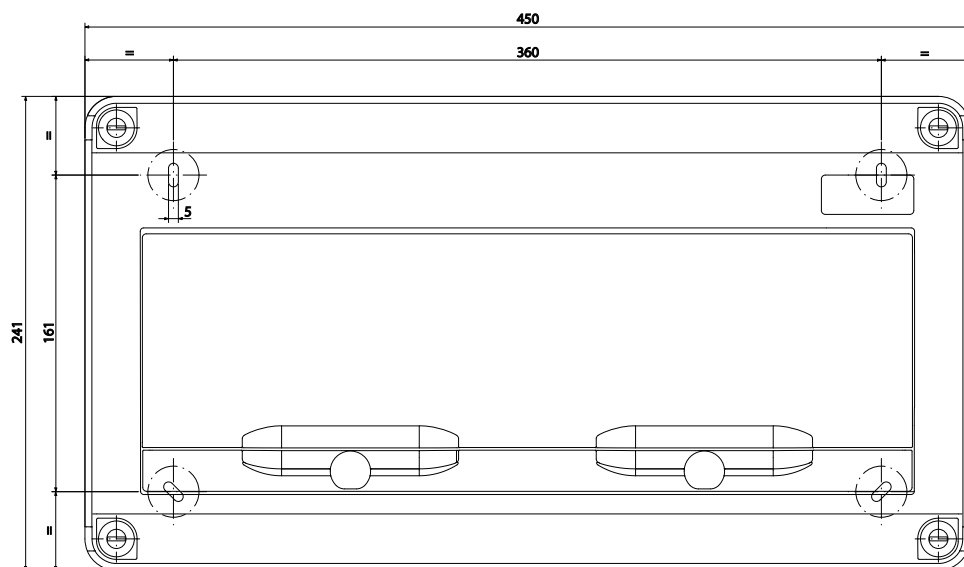

Ai sensi delle Decisioni e delle Direttive Europee applicabili, si informa che il responsabile dell'immissione del prodotto sul mercato Comunitario è:

According to the applicable Decisions and European Directives, the responsible for placing the apparatus on the Community market is:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy Tel: +39 035 946 111 Fax: +39 035 946 270 E-mail: qualitymarks@gewiss.com



+39 035 946 111

8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com

ULTIMA REVISIONE 06/2016