















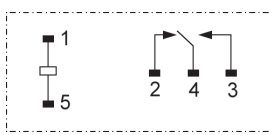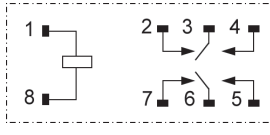





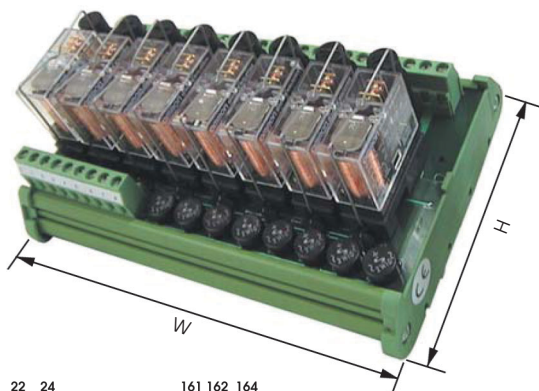
General Purpose Control Relays - Plug-In Type

PART NUMBER	FORM	COIL	RESISTIVE LOAD	INDUCTIVE LOAD	TRADE PRICE	DIMENSIONS			
						W	H	D	
1 Pole 10 Amps		JQX-14FT-1C			16 Amps 300 Volts (max rating)	UL	US	CE	
Standard Relay (G2R-1)									
JQX-14FT-1C-240VAC	SPDT	240V AC	10A 250VAC 10A 30VDC	7.5A 250VAC 5A 30VDC			13	29	29
JQX-14FT-1C-24VAC		24V AC							
JQX-14FT-1C-24VDC		24V DC							
SRU05-E	Base						18.5	77	62
2 Poles 5 Amps		JQX-14FT-2C			10 Amps 300 Volts (max rating)	UL	US	CE	
Standard Relay (G2R-2)									
JQX-14FT-2C-240VAC	DPDT	240V AC	5A 250VAC 5A 30VDC	2A 250VAC 3A 30VDC			13	29	27.5
JQX-14FT-2C-24VAC		24V AC							
JQX-14FT-2C-24VDC		24V DC							
SRU08-E	Base						18.5	77	62
2 Poles 5 Amps		JQX-13F-KF2CL			10 Amps 300 Volts (max rating)	UL	US	CE	
LED Indicator and Push-to-Test Button (MY2)									
JQX-13F-KF2CL-240VAC	DPDT	240V AC	5A 250VAC 5A 30VDC	2A 250VAC 2A 30VDC			21.5	28	36
JQX-13F-KF2CL-24VAC		24V AC							
JQX-13F-KF2CL-24VDC		24V DC							
PYF08A-E	Base						22	75	30
4 Poles 3 Amps		JQX-13F-KF4CL			7 Amps 300 Volts (max rating)	UL	US	CE	
LED Indicator and Push-to-Test Button (MY4)									
JQX-13F-KF4CL-240VAC	4PDT	240V AC	3A 250VAC 3A 30VDC	0.8A 250VAC 1.5A 30VDC			21.5	28	36
JQX-13F-KF4CL-24VAC		24V AC							
JQX-13F-KF4CL-24VDC		24V DC							
PYF14A-E	Base						29	75	30

General Purpose Power & Control Relays - Plug-In Type

PART NUMBER	FORM	COIL	RESISTIVE LOAD	INDUCTIVE LOAD	TRADE PRICE	DIMENSIONS			
						W	H	D	
2 Poles 10 Amps 			JQX-LY2CL  Relay Bottom View				10 Amps 300 Volts (max rating)		
									
With LED Indicator (LY2)									
JQX-LY2CL-240VAC	DPDT	240V AC	10A 250VAC 10A 30VDC	1/2HP 240VAC			21.5	28	36
JQX-LY2CL-24VAC		24V AC					21.5	28	36
JQX-LY2CL-24VDC		24V DC					21.5	28	36
PTF08A-E	Base						28	78	33
4 Poles 10 Amps 			JQX-LY4CL  Relay Bottom View				10 Amps 300 Volts (max rating)		
									
With LED Indicator (LY4)									
JQX-LY4CL-240VAC	4PDT	240V AC	10A 250VAC 10A 30VDC	1/2HP 240VAC			41.5	28	36
JQX-LY4CL-24VAC		24V AC					41.5	28	36
JQX-LY4CL-24VDC		24V DC					41.5	28	36
PTF14A-E	Base						46	78	33

Multi Relay Interface Modules - DIN Rail Mount, PLC I/O




Features:

- Compact size
- Suit relays 1 pole 10A C/O
- LED indication on relay input
- Surge suppression diode on relay coils
- Suitable for 35mm DIN rail mounting
- Fuse protection for output circuits
- Non-polarised input
- Operating temperature -20 to +55°C

Other Options:

- Modules with connector and terminal inputs
- Modules for 2 pole C/O relays and connectors
- Modules with test push buttons
- A selection of connecting cable are available on request

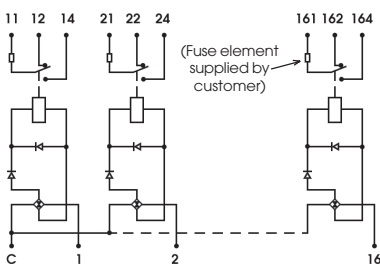

Wiring diagram of electromechanical relays with 24VDC non-polarised power supply (12VDC modules available on request)

PART NUMBER	DESCRIPTION	TRADE PRICE	DIMENSIONS		
			W	H	D
RM4-24DFZ	4 Relay Module 24VDC		79.5	92	74
RM8-24DFZ	8 Relay Module 24VDC		136.5	92	74

Notes: 12 and 16 relay modules available on request