



## Round cable entry plates with internal frame and locknut

- ▶ For several number of non-terminated cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66-68)
- ▶ Metric sized



2

The round metric DES-PDM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

### Technical data

**Material:** TPE

**Flammability:** self-extinguishing acc. to UL94-V0

**Temperature:** -40°C... +105°C (static)

**Features:** halogens and silicones free

### Related products


Hydraulic punch driver HY360

Model	Code	Cable nr. - Ø cables min/max [mm]	Thread x1.5	Dimensions Ø P [mm]	Pcs /pack
DES-PDM M32 4G	1732033204	3 - 2.6 / 6.5 1 - 5.5 / 12.5	M32	46	1 / 10
DES-PDM M32 4-2G	1732033242	4 - 3.5 / 8.8			
DES-PDM M32 7G	1732033207	7 - 2.6 / 6.5			
DES-PDM M40 8G	1732034008	4 - 2.6 / 6.5 4 - 4 / 10.2	M40	54	1 / 10
DES-PDM M50 8G	1732035008	5 - 4.6 / 10.2 3 - 6.8 / 12.5	M50	64	1 / 10
DES-PDM M50 10G	1732035010	7 - 2.8 / 6.5 2 - 4.6 / 10.2 1 - 14.5 / 22			
DES-PDM M50 12G	1732035012	4 - 2.8 / 6.5 8 - 4.6 / 10.2			
DES-PDM M50 19G	1732035019	19 - 2.8 / 6.5			
DES-PDM M63 9G	1732036309	1 - 2.6 / 6 3 - 4.6 / 10.2 4 - 8.6 / 16.2 1 - 10.9 / 20	M63	77	1 / 10
DES-PDM M63 13G	1732036313	4 - 2.8 / 6 4 - 4.6 / 10.2 5 - 9.5 / 16.2			
DES-PDM M63 14G	1732036314	14 - 5 / 10			
DES-PDM M63 35G	1732036335	35 - 2.6 / 5.5			

Double membrane



### Dimensions [mm]

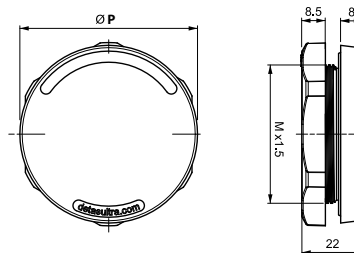



Model	Code	Cable nr. - Ø cables min/max [mm]	Thread x1.5	Dimensions Ø P [mm]	Pcs /pack
DES-PDM M32 4B	1732034205	3 - 2.6 / 6.5 1 - 5.5 / 12.5	M32	46	1 / 10
DES-PDM M32 4-2B	1732034252	4 - 3.5 / 8.8			
DES-PDM M32 7B	1732034208	7 - 2.6 / 6.5			
DES-PDM M40 8B	1732035009	4 - 2.6 / 6.5 4 - 4 / 10.2	M40	54	1 / 10
DES-PDM M50 8B	1732036009	5 - 4.6 / 10.2 3 - 6.8 / 12.5	M50	64	1 / 10
DES-PDM M50 10B	1732036011	7 - 2.8 / 6.5 2 - 4.6 / 10.2 1 - 14.5 / 22			
DES-PDM M50 12B	1732036013	4 - 2.8 / 6.5 8 - 4.6 / 10.2			
DES-PDM M50 19B	1732036020	19 - 2.8 / 6.5			
DES-PDM M63 9B	1732037310	1 - 2.6 / 6 3 - 4.6 / 10.2 4 - 8.6 / 16.2 1 - 10.9 / 20	M63	77	1 / 10
DES-PDM M63 13B	1732037314	4 - 2.8 / 6 4 - 4.6 / 10.2 5 - 9.5 / 16.2			
DES-PDM M63 14B	1732037315	14 - 5 / 10			
DES-PDM M63 35B	1732037336	35 - 2.6 / 5.5			

## Round cable entry plates with internal frame and locknut


- ▶ For several number of non-terminated cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66-68)
- ▶ Metric sized



The round metric DES-PDM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Double membrane

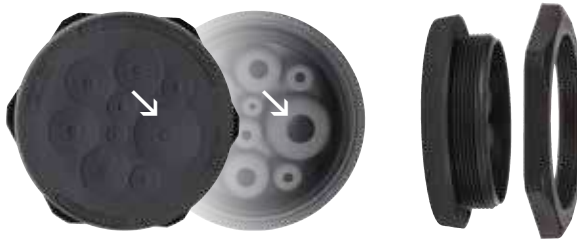

## Technical data

**Material:** TPE

**Flammability:** self-extinguishing acc. to UL94-V0

**Temperature:** -40°C... +105°C (static)

**Features:** halogens and silicones free

## Related products

Hydraulic punch driver HY360

## Dimensions [mm]

