








| Model | Code | Cable nr. - Ø cables min/max [mm] | Dimensions [mm] | | Pcs /pack |
|--------------------------------------------------------------------------------------------------|------------|--------------------------------------|-----------------|-------|--------------|
| | | | Cut-out | Plate | |
|  DES-PDP 50G | 1732050050 | 1 - 17 / 42 | M50 | 50.5 | 1 / 10 |
|  DES-PDP 63G | 1732050063 | 1 - 23 / 55 | M63 | 63.5 | |
|  DES-PDP 50B | 1732052050 | 1 - 17 / 42 | M50 | 50.5 | 1 / 10 |
|  DES-PDP 63B | 1732052063 | 1 - 23 / 55 | M63 | 63.5 | |

Round base, pyramid-shaped cable entry plate with locknut

- ▶ For diameters from 17 to 55 mm
- ▶ Reinforcing base plate
- ▶ Cost efficient solution
- ▶ UL94V0 for grey and black



Dimensions [mm]

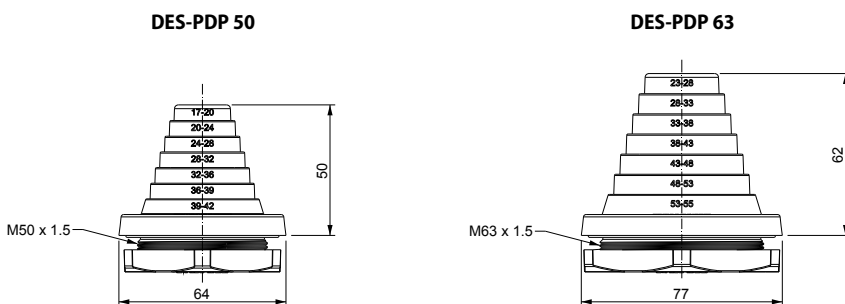

The DES-PDP is available in M50 and M63 sizes, enabling non-terminated cables from 17 to 55mm in diameter to pass through the wall of the electrical cabinet.

The reinforcing base plate increases the stability where large cables are used.

2

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Related products

Hydraulic punch driver HY360

