

## A-5536101

ON-OFF SWITCH DISCONNECTOR 4P 63A.D2 IP65




<b>Code</b>	009A-5536101
<b>EAN</b>	8430892339063
<b>Product description</b>	Cam switch-disconnector and IP65 gasket, with 0-1 red front plate 64x64 for panel fixing. 5 poles 63A. Size D2. Ergonomic screwless quick-mount handle. Connection with cage terminals for 16-50 mm <sup>2</sup> cable. Compatible with multiple accessories from the A5 series.


### Logistic data

<b>Customs code</b>	85365080
<b>ETIM code</b>	EC000216
<b>Package units</b>	1
<b>Product gross weight (kg)</b>	0.49
<b>Package height (mm)</b>	107
<b>Package width (mm)</b>	82
<b>Package length (mm)</b>	82

## Technical data

Thermal rating (I <sub>th</sub> )	70 A
Wire section (AWG)	16 - 1
Wire section flexible	16 - 50 mm <sup>2</sup>
Tightening torque	3,5 Nm
Connection screws	M8
Terminal	
Max. fuse protection (gG/aM)	63/63 A (415 V) 63/63 A (500 V)
Conditional shortcircuit current (I <sub>cc</sub> )	8 kA (415 V) 8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Operational rating (I <sub>e</sub> )	63 A
Dummy AC-21A	22 kW (3x230 V) 45 kW (3x415 V) 45 kW (3x500 V)
Mixed load AC-22A	18,5 kW (3x230 V) 37 kW (3x415 V) 45 kW (3x500 V)
Motor load AC-23A	15 kW (3x230 V) 22 kW (3x415 V) 30 kW (3x500 V)
UL Electric characteristics	5 hp 1-fase (110-120 V) 10 hp 1-fase (220-240 V) 15 hp 3-fase (220-240 V) 25 hp 3-fase (380-415 V) 30 hp 3-fase (440-480 V) 32 hp 3-fase (550-600 V)
Standards	IEC 60947-3 UL 508

## Dimensions

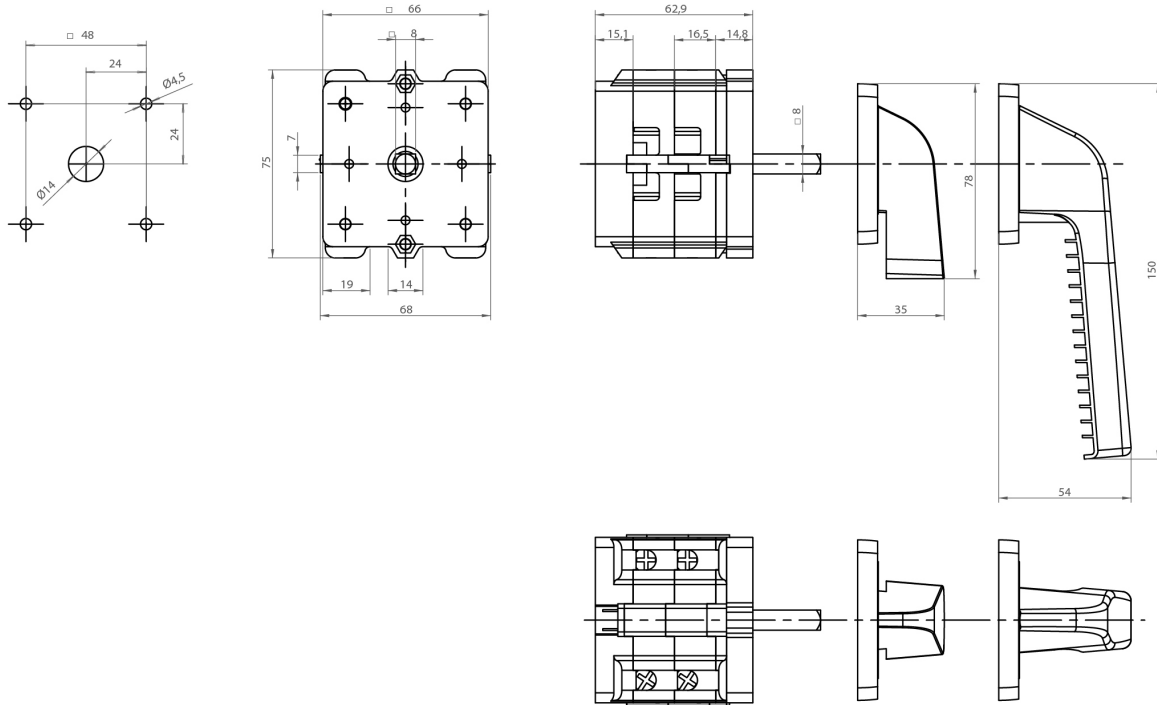

## Connection

7	8	X
5	6	X
3	4	X
1	2	X
553	0	1

