

Part number
CKM 03




Male insert, CK series, screw terminal connection, 3 poles + PE, 10 A 230/400 V 4 kV 3, size "21.21"

Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CK	Other materials	Contacts: copper alloy Gasket: NBR
Connection type	Screw terminal connection	Colour	RAL 7032 grey
Gender	Male	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles +	China RoHs - EFUP	50
Size	Size 21.21	REACH SVHC substances	Yes Lead
Technical data		SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Current	10 A	Approvals / Standards	
Voltage	230 - 400 V	Reference standard	EN 61984:2009-06
Rated impulse withstand voltage	4 kV	Certifications	CSA, CQC, DNV, BV, EAC
Pollution degree	3	UL	ECBT2
Rated voltage according to UL/CSA	600 V	General ordering information	
Wire cross-section	0,75 mm ² - 2,50 mm ²	EAN13 code	8015747028172
AWG size	18 - 14	eCl@ss 8.1	27440205
Contact type	Turned silver plated	ETIM 7.0	EC000438
IP degree of protection	IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure	Packaging Information	
Further technical details		Packaging length	210,00 mm
Characteristics according to EN 61984	10A 230/400V 4kV 3; 10A 400/690V 4kV 2	Packaging height	200,00 mm
Mating cycles	≥ 500	Packaging width	130,00 mm
Insulation resistance	≥ 10 GΩ	Packaging weight	3,11 kg
Contact resistance	≤ 2 mΩ	Packaging volume	5,46 dm ³
Weight	14,00 g	Packaging description	Carton box
Operating temperature range (min, max)	-40°C ... +100°C	Packaging quantity	200 Pcs
Conductors stripping length	6 mm	Packaging EAN code	8015747028189
UL 94 flammability rating	V-1	Sub-packaging length	197,00 mm
Torque for main contact	M3: 0,5 Nm; 4,4 lb.in (0,5 x 3 mm)	Sub-packaging height	35,00 mm
Tightening torque for PE connection	M3: 0,5 Nm; 4,4 lb.in (0,5 x 3 mm)	Sub-packaging width	113,00 mm
Tightening torque for fixing screws	M3: 0,5 Nm; 4,4 lb.in (Ph1 or 0,8 x 5,5 mm)	Sub-packaging weight	0,62 kg
		Sub-packaging volume	0,78 dm ³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	40 Pcs
		Sub-packaging EAN barcode	8015747028196

Part number
CKM 03




Catalogue drawings

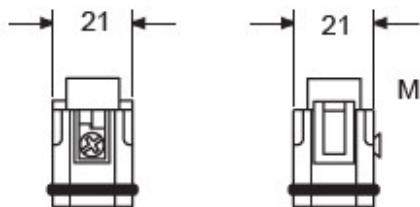

contacts side (front view)



Derating curves

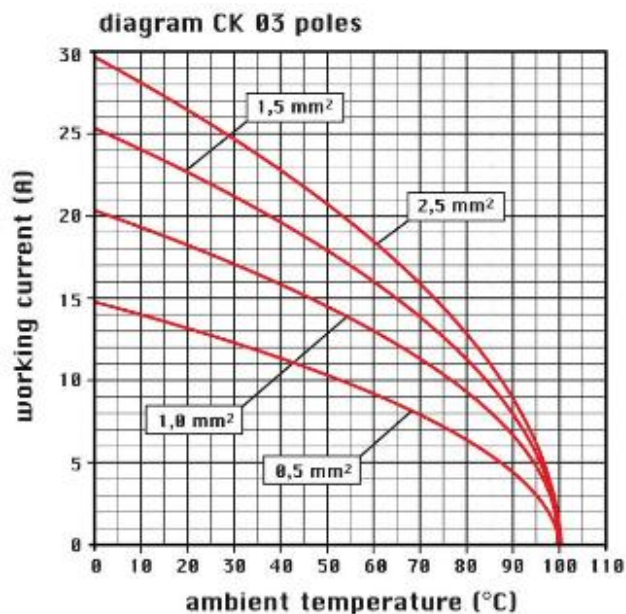

Notes

Dimensions shown in mm are not binding and may be changed without notice.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

Part number

CKR 65



Screw, with gasket, for IP66/67/69 for enclosures 21.21

Product description

Product type Screw
Specification With gasket, for IP66/IP67/IP69

Further technical details

Weight 0,70 g

General ordering information

EAN13 code 8015747028417
eCl@ss 8.1 27449290
ETIM 7.0 EC002943

Packaging Information

Packaging weight 0,36 kg
Packaging description Plastic bag
Packaging quantity 500 Pcs
Packaging EAN code 8015747171076
Sub-packaging description Plastic bag
Sub-packaging quantity 10 Pcs
Sub-packaging EAN barcode 8015747028424

Part number

CKR 65



Notes

CKR 65: for CK, CQ 05 and CKS inserts

Dimensions shown in mm are not binding and may be changed without notice.
