




Watertight enclosure for emergency systems, equipped with illuminated push-button and 2 contacts 1NO+1NC that can be expanded up to 4 contacts. The enclosure has the pre-arrangement for use of green led to indicate the good condition of emergency circuit. It is pre-arranged with a short or long push-button for deliberate operation, or with an intrinsic safety function. Thanks to the emergency hammer, available as an accessory, sealable mask and halogen free materials are ideally suited for applications in areas open to public.

Rated current (A)	125	Insulation class	II
Colour	Red RAL 3000	Outer dim. LxHxD (mm)	120x120x50
IP degree	IP55	Installation	Wall mounting
Material	Technopolymer	Shock resistance	IK08
Rated voltage (V)	400	Accessories supplied	Push-button + 2 contacts
Glow Wire Test	650 °C	Operating temperature	-25 +60 °C
Type of material	Halogen-free in compliance with EN 60754-2	Electrocod	0321
No. of contacts that can be installed	4	Thermo-pressure with ball	70 °C
Standard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Insulation voltage	750 V

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance

DIMENSIONAL

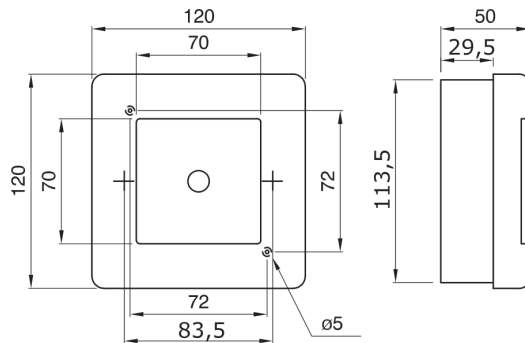

TECHNICAL SYMBOLOGY




IP55



IK08



650 °C



EN 60754-2



EN 60695-10-2
70 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 29/04/2018

Data, measures, designs and pictures are shown only as
informativ purposes,
and could be changed without previous notice