Product Data Sheet

GW42204

42 RV Range

Watertight enclosure RAL 3000 for emergency systems fitted with hole Ø22, compatible with momentary push-buttons, selectors and indicators of the 74 PS series. Thanks to the emergency hammer, available as an acessory, sealable mask and halogen free materials are ideally suited for applications in areas open to public.

Rated current (A)	125	**Insulation class**	II
Colour	Red RAL 3000	**Outer dim. LxHxD (mm)**	108x180x100
IP degree	IP55	**Installation**	Wall mounting
Material	Technopolymer	**Shock resistance**	IK08
Rated voltage (V)	400	**Glow Wire Test**	650 °C
Operating temperature	-25 +60 °C	**Type of material**	Halogen-free in compliance with EN 60754-2
Electrocod	0321	**Thermo-pressure with ball**	70 °C
Standard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	**Insulation voltage**	750 V
No. of modules EN 50022	4		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance

DIMENSIONAL

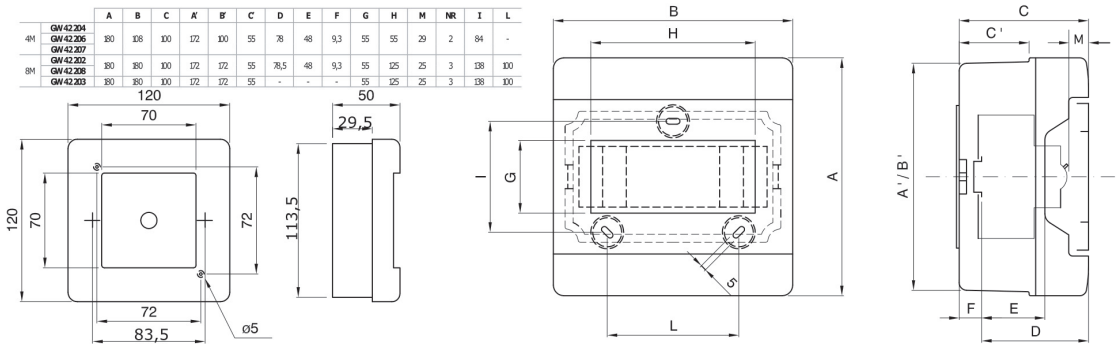

TECHNICAL SYMBOLOGY



IP55 IK08 650 °C 70 °C

STANDARDS/APPROVALS

CE

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 30/04/2018

Data, measures, designs and pictures are shown only as informativ purposes,
and could be changed without previous notice