



Description HIGH PERFORMANCE MINIATURE CIRCUIT BREAKER

Code MTHP 160

No. of poles 4P

No. modules 6


Rated current 63 A

Curve D

Rated voltage 230-400 V

Standard	EN 60898, EN 60947-2	Rated frequency (Hz)	50/60 Hz
Breaking capacity EN 60898 230V (Icn)	10000 A	Breaking capacity EN 60898 400V (Icn)	10000 A
Breaking capacity EN 60898 (Ics)	0.75 x Icn	Breaking capacity EN 60947-2 230V (Icu)	20 kA
Breaking capacity EN 60947-2 400V (Icu)	16 kA	Breaking capacity EN 60947-2 (Ics)	50% Icu
Insulation voltage	500 V	Rated impulse withstand voltage	6 kV
Minimum operating voltage	12V ac/dc	Maximum operating voltage	440V AC / 220V DC
Electrical endurance	10000	Mechanical endurance	20.000
Section rigid cable	<=1x70 - <=2x25 - <=2x25+1x10 mm <sup>2</sup>	Section flexible cable	<=1x50(2) - <=2x25 - <=3x16 mm <sup>2</sup>
Rated tightening torque	3.5 / 3 (terminals)	Operating temperature	-25 +60 °C
Stocking temperature	-40 +70 °C	Electrocod	1411

## DIMENSIONAL

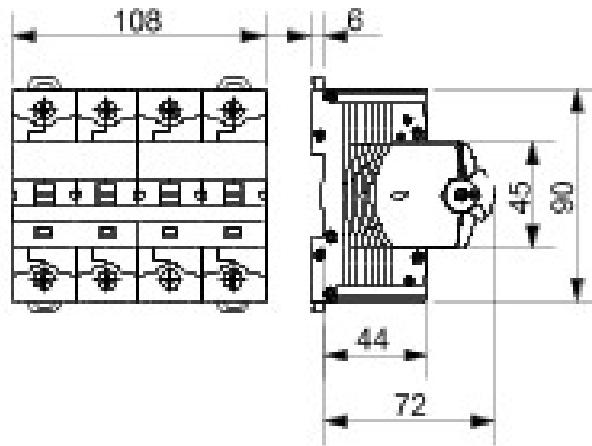

## STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 29/05/2020

Data, measures, designs and pictures are for information purpose only, last update . They can be changed at any moment, therefore it is always recommended to read the last updated version

published on the website [www.gewiss.com](http://www.gewiss.com). Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>.